


Model Name	VT-156UTx3		
Description			
Product Type	USB Type C plastic design true flat series LCD monitor		
Chassis Type	Plastic chassis with 100 x 100 mm VESA mount		
Enhanced Chassis	Front IP52		
DICOM	N/A		
Glass / Touch Panel	Projective capacitive touch (USB interface) / Glass (Optional)		
LCD Panel Spec	15.6" /AU –G156HAN02.303 (LED backlight) / MVA		
Panel Resolution	1920 x 1080 pixels		
Active Screen Area	344.16 x 193.59 mm		
Color Depth	16.7M colors		
Brightness / Contrast	500 nits / 1000:1		
Viewing Angle (Typ.)	178°(H) / 178°(V)		
Support Resolution	640 x 480	800 x 600	1024 x 768
	1280 x 1024	1360 x 768	1680 x 1050
	1920 x 1080		
I/O Port	HDMI 1.4		
	USB Type C (USB touch / power / DP)		
	USB-Type A 2.0x1 (USB Hub)		
	DC Jack (2.5mm lockable)		
Audio	2.5W / 8Ω x2		
Power (USB-C)	Max. 60W (20V host system required) (Optional)		
Power (DC 2.5mm)	External power adapter, AC IN: 100 ~ 240V ; DC OUT: 12V/5A (optional) (When both Type C and DC are connected simultaneously, DC power will be use as first priority.)		
Power Consumption	Max. 23.86 W(reference)		
Accessory	USB type C cable / HDMI cable / CD		

Dimension	Main body : 392.96(W) 242.36(H) 48(D) mm
	Packing : 343(W) 58(H) 250(D) mm
Net Weight (Reference)	2.81 kg
Gross Weight (Reference)	4.11 kg
Temperature Range	Operating : 5 ~ 40°C / Storage : -10 ~ 60°C
Humidity Range	Operating : 20 ~ 80% / Storage : 10 ~ 90%
EMC / Safety	RoHS / WEEE / REACH

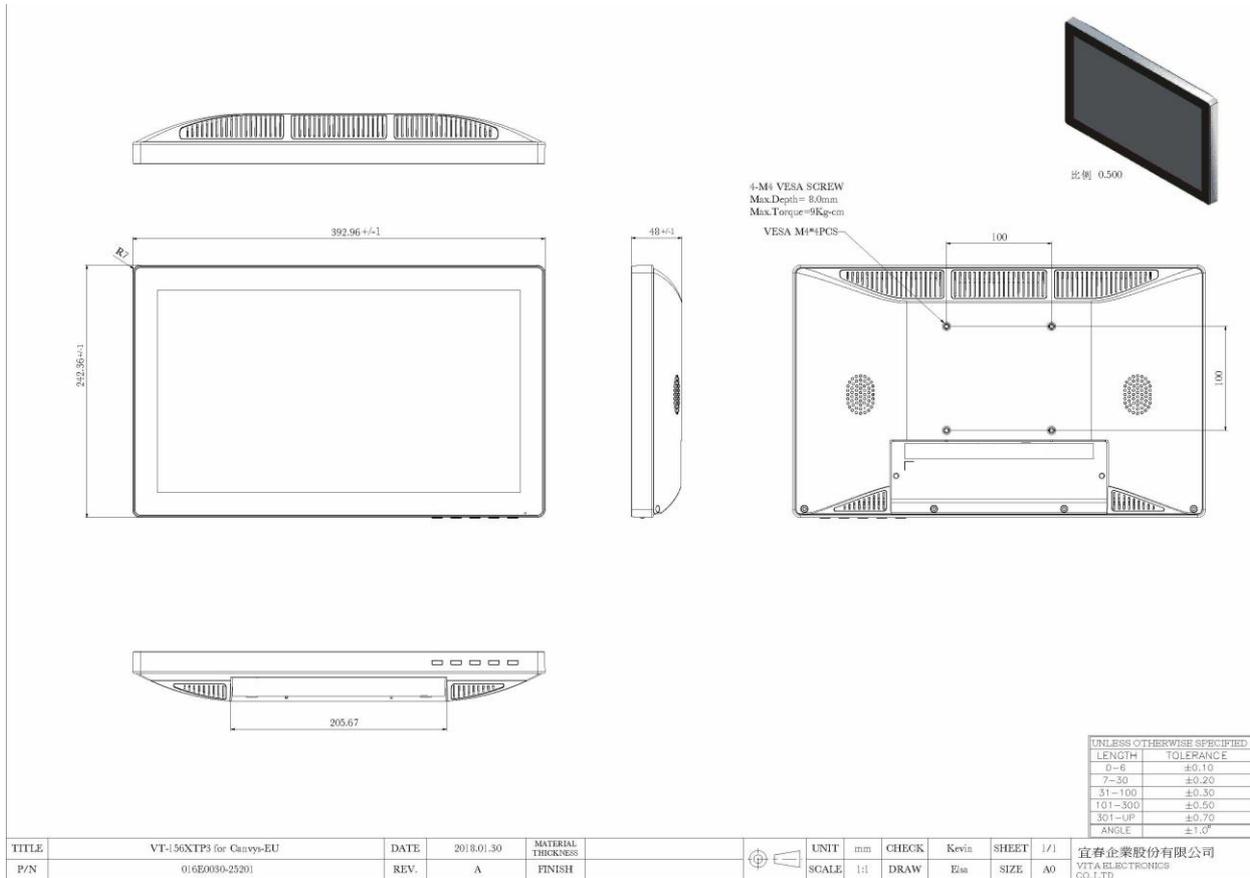

* Specifications are subject to change without notice

VITA Electronics CO., LTD

TEL: +886-2-2659-5977

FAX: +886-2-2659-5976

www.vita-color.com