


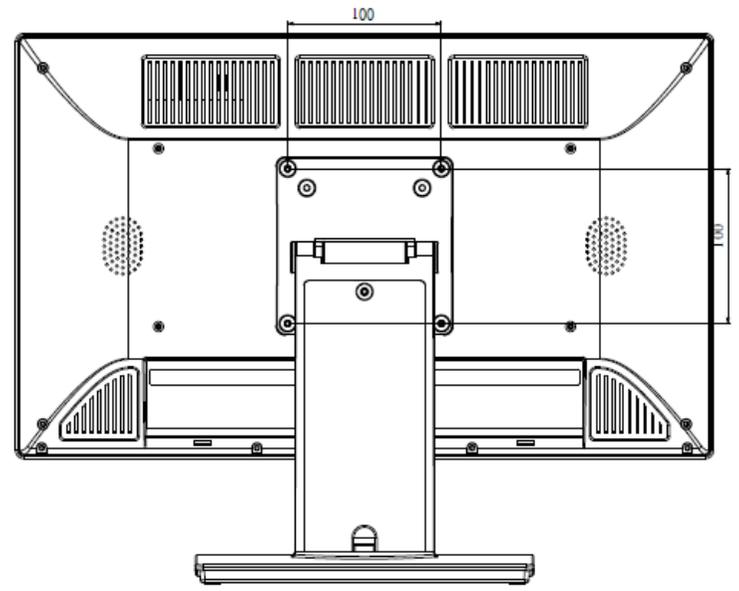


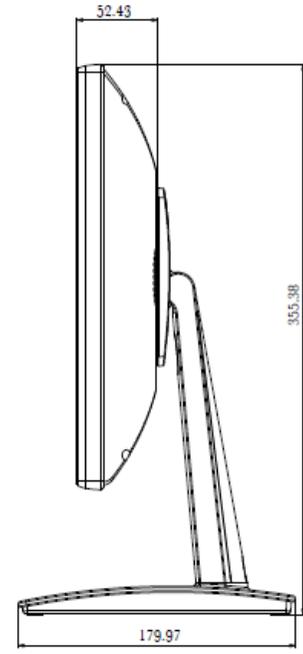

| Model Name | VT-185XTx3 | VT-185XTx4 | VT-185DTx3 | VT-185DTx4 |
|------------------------------|---|------------|------------|------------|
| Description | | | | |
| Product Type | True Flat Series Plastic LCD monitor | | | |
| Chassis Type | Plastic chassis (ABS) with 100 x 100 mm VESA mount | | | |
| Enhanced Chassis | N/A | | | |
| Glass / Touch Panel | Optional: Projective capacitive touch (USB interface) / Glass | | | |
| LCD Panel Spec | 18.5" LED backlight | | | |
| Panel Resolution | 1366 x 768 pixels | | | |
| Active Screen Area | 409.8 x 230.4 mm | | | |
| Color Depth | 16.7M colors (RGB 6-bit + Hi-FRC) | | | |
| Brightness / Contrast | 450 nits / 1000 :1 | | | |
| Viewing Angle (Typ.) | 170°(H) / 160°(V) | | | |
| Support Resolution | 640 x 480 800 x 600 | | | |

| | | | | |
|-----------------------------|---|--|---|--|
| | 1024 x 768 | | | |
| | 1366 x 768 | | | |
| I/O Port | D-Sub (VGA) DP 1.2 HDMI 1.4a Audio in (3.5mm Phone Jack) USB 2.0 Type B(Touch) (Optional) DC Jack (ϕ = 2.0mm) | D-Sub (VGA) DP 1.2 HDMI 1.4a Audio in (3.5mm Phone Jack) USB 2.0 Type B(Touch) (Optional) AC Socket | D-Sub (VGA) DVI Audio in (3.5mm Phone Jack) USB 2.0 Type B(Touch) (Optional) DC Jack (ϕ = 2.0mm) | D-Sub (VGA) DVI Audio in (3.5mm Phone Jack) USB 2.0 Type B(Touch) (Optional) AC Socket |
| Audio | Optional: 2.5W (8 Ω) speaker x 2 | | | |
| Power | External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A | Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz | External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A | Internal power adapter, AC IN: 100~240V;50/60Hz |
| Power Consumption | Max. 25.2 W | | | |
| Accessory (Optional) | VGA cable DP cable HDMI cable Audio cable USB cable Adapter Power cable, CD | VGA cable DP cable HDMI cable Audio cable USB cable Adapter Power cable, CD | VGA cable DVI cable Audio cable USB cable Adapter Power cable, CD | VGA cable DVI cable Audio cable USB cable Adapter Power cable, CD |
| Dimension | Main body : 454.07(W) 355.38(H) 179.97(D) mm | | | |

| | |
|---------------------------------|---|
| | Packing : 500(W) 450(H) 260(D) mm |
| Net Weight (Reference) | 5.0 kg |
| Gross Weight (Reference) | 7.0 kg |
| Temperature Range | Operating : 5 ~ 40°C / Storage : -10 ~ 60°C |
| Humidity Range | Operating : 20 ~ 80% / Storage : 10 ~ 90% |
| EMC / Safety | IEC62368 / CE / FCC, RoHS / REACH |

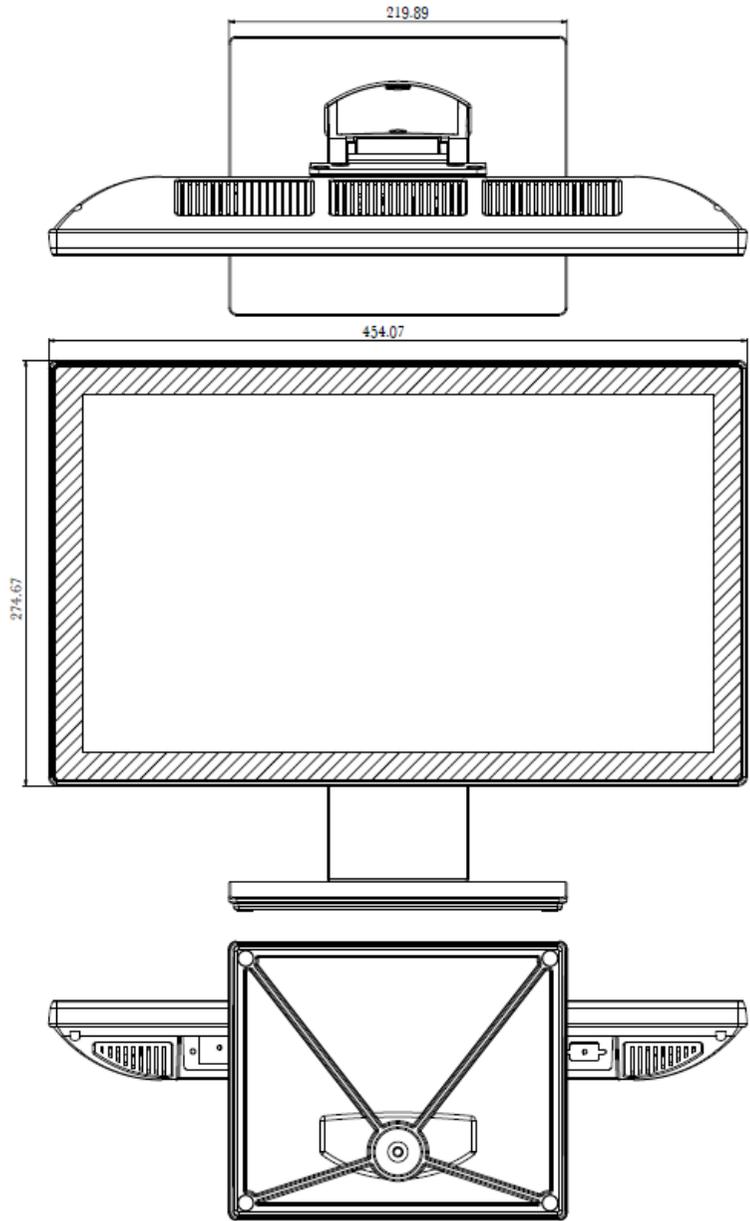

比例 1:100

| UNLESS OTHERWISE SPECIFIED | |
|----------------------------|-----------|
| LENGTH | TOLERANCE |
| 0-6 | ±0.10 |
| 7-30 | ±0.20 |
| 31-100 | ±0.30 |
| 101-300 | ±0.50 |
| 301-UP | ±0.70 |
| ANGLE | ±1.0° |

| | | | | | | | | | | |
|-------|------|-----------------|--------------------|--|-------|-----|-------|-------|-------|-----|
| TITLE | DATE | 2020.02.18 | MATERIAL THICKNESS | | UNIT | mm | CHECK | Kevin | SHEET | 1/1 |
| P/N | REV. | 018-00000-25201 | FINISH | | SCALE | 1:1 | DRAW | Elga | SIZE | A0 |

宜春企業股份有限公司
VITA ELECTRONICS
CO.,LTD