




Model Name	VT-215NPx1	VT-215NPx2	VT-215XPx3	VT-215XPx4	VT-215DPx3	VT-215DPx4
Description						
Product Type	Plastic LCD monitor					
Chassis Type	Plastic chassis (ABS) with 100 x 100 mm VESA mount					
Enhanced Chassis	N/A					
Glass / Touch Panel	Optional: 5 wire resistive touch (USB interface)					
LCD Panel Spec	21" LED backlight					
Panel Resolution	1920 x 1080 pixels					
Active Screen Area	476.064 x 267.786 mm					
Color Depth	16.7M colors					
Brightness / Contrast	250 nits / 1000 :1					
Viewing Angle (Typ.)	178°(H) / 178°(V)					
Support Resolution	640 x 480 800 x 600					

	1024 x 768					
	1280 x 1024					
	1360 x 768					
	1680 x 1050					
	1920 x 1080					
I/O Port	D-Sub (VGA) HDMI 1.3a BNC in BNC out Audio in (3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack ($\phi = 2.0\text{mm}$)	D-Sub (VGA) HDMI 1.3a BNC in BNC out Audio in (3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket	D-Sub (VGA) HDMI 1.4a DP 1.2 Audio in (3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack ($\phi = 2.0\text{mm}$)	D-Sub (VGA) HDMI 1.4a DP 1.2 Audio in (3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket	D-Sub (VGA) DVI Audio in (3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack ($\phi = 2.0\text{mm}$)	D-Sub (VGA) DVI Audio in (3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket
Audio	Optional: 2.5W (8 Ω) speaker x 2					
Power	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A	Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A	Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A	Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz
Power Consumption	Max. 24.4 W					
Accessory (Optional)	VGA cable		VGA cable		VGA cable	

	HDMI cable BNC cable Audio cable USB cable Adapter (for external) Power cable, CD	HDMI cable DP cable Audio cable USB cable Adapter (for external) Power cable, CD	DVI cable Audio cable USB cable Adapter (for external) Power cable, CD
Dimension	Main body : 525.21(W) 378(H) 179.97(D) mm		
	Packing : 575(W) 475(H) 259(D) mm		
Net Weight (Reference)	6.0 kg (w/ touch) / 5.1 kg (w/o touch)		
Gross Weight (Reference)	7.9 kg (w/ touch) / 7.0 kg (w/o touch)		
Temperature Range	Operating : 5 ~ 40°C / Storage : -10 ~ 60°C		
Humidity Range	Operating : 20 ~ 80% / Storage : 10 ~ 90%		
EMC / Safety	IEC62368 / CE / FCC, RoHS / REACH		

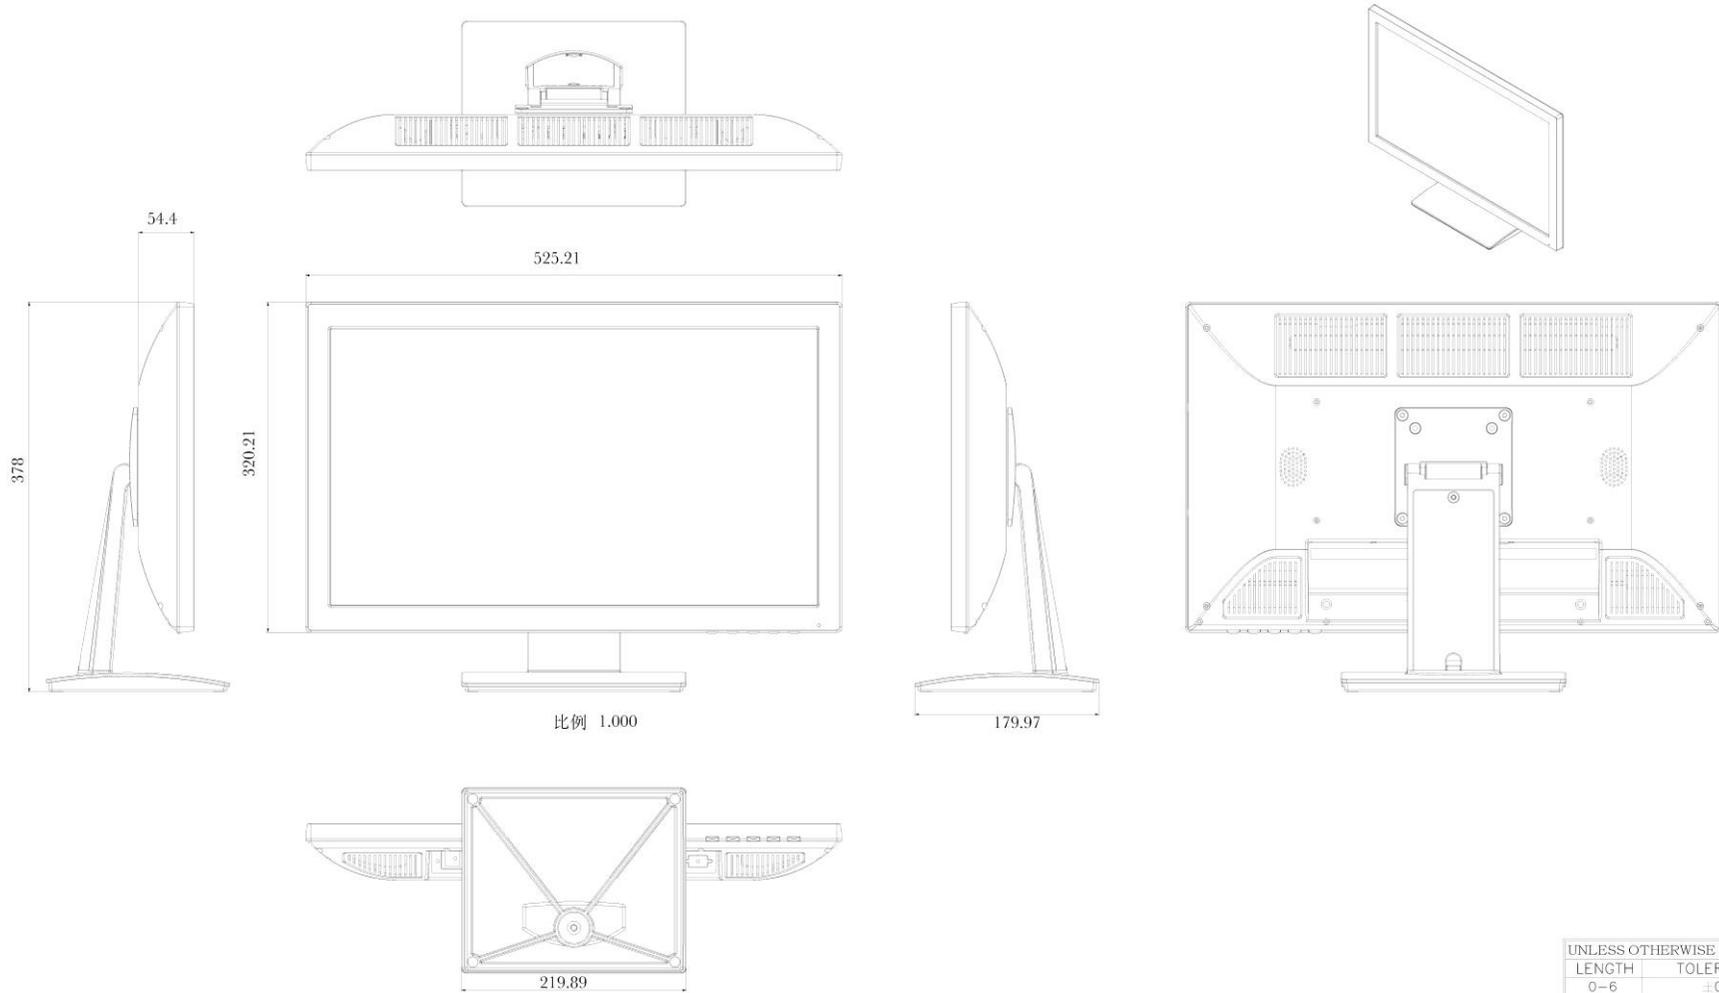

比例 1.000

UNLESS OTHERWISE SPECIFIED	
LENGTH	TOLERANCE
0-6	±0.10
7-30	±0.20
31-100	±0.30
101-300	±0.50
301-UP	±0.70
ANGLE	±1.0°

TITLE	21.5" 非全平面+方型底座	DATE	2019.11.20	MATERIAL THICKNESS		UNIT	mm	CHECK	Kevin	SHEET	1/1	宜春企業股份有限公司 VITA ELECTRONICS CO.,LTD
P/N	VT-215	REV.		FINISH	RAL9003白	SCALE	1:1	DRAW	Elsa	SIZE	A0 MAX	