






Model Name	VT-240DPx3	VT-240DPx4	VT-240XPx3	VT-240XPx4
Description				
Product Type	Plastic LCD monitor			
Chassis Type	Plastic chassis ( ABS ) with 100 x 100 / 100 x 200 mm VESA mount			
Enhanced Chassis	N/A			
Glass / Touch Panel	Optional: Capacitive touch (USB interface)			
LCD Panel Spec	24" LED backlight			
Panel Resolution	1920 x 1080 pixels			
Active Screen Area	531.36 x 298.89 mm			
Color Depth	16.7M colors (RGB 8-bits)			
Brightness / Contrast	300 nits / 5000 :1			
Viewing Angle (Typ.)	178°(H) / 178°(V)			
Support Resolution	640 x 480 800 x 600			

	1024 x 768 1280 x 1024 1360 x 768 1680 x 1050 1920 x 1080			
<b>I/O Port</b>	D-Sub ( VGA ) DVI Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack ( $\phi = 2.0\text{mm}$ )	D-Sub ( VGA ) DVI Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket	D-Sub ( VGA ) DP 1.2 HDMI 1.4a Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack ( $\phi = 2.0\text{mm}$ )	D-Sub ( VGA ) DP 1.2 HDMI 1.4a Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket
<b>Audio</b>	Optional : 2.5W ( 8 $\Omega$ ) speaker x 2			
<b>Power</b>	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A	Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A	Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz
<b>Power Consumption</b>	Max. 29.8 W			
<b>Accessory (Optional)</b>	VGA cable DVI cable Audio cable USB cable Adapter Power cable, CD	VGA cable DVI cable Audio cable USB cable Power cable, CD	VGA cable DP cable HDMI cable USB cable Audio cable Adapter	VGA cable DP cable HDMI cable USB cable Audio cable Power cable, CD

		Power cable, CD
<b>Dimension</b>	Main body :575.86(W) 447.23(H) 249.86(D) mm	
	Packing : 645(W) 545(H) 295(D) mm	
<b>Net Weight</b> (Reference)	8.3 kg (w/ touch) / 7.3 kg (w/o touch)	
<b>Gross Weight</b> (Reference)	11.7 kg (w/ touch) / 10.7 kg (w/o touch)	
<b>Temperature Range</b>	Operating : 5 ~ 40°C / Storage : -10 ~ 60°C	
<b>Humidity Range</b>	Operating : 20 ~ 80% / Storage : 10 ~ 90%	
<b>EMC / Safety</b>	IEC62368 / CE / FCC, RoHS / REACH	

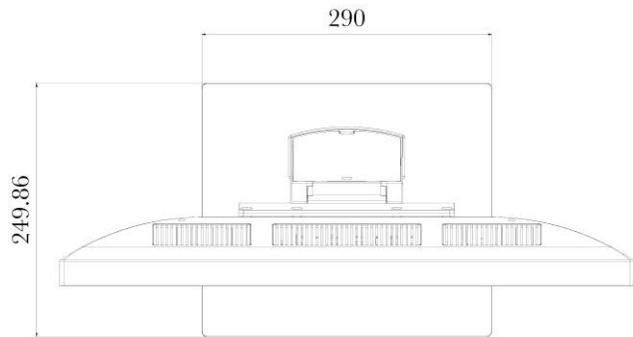

比例 0.800

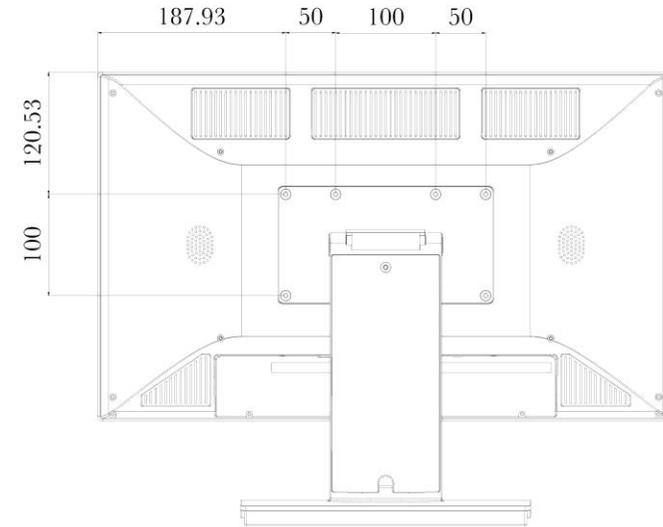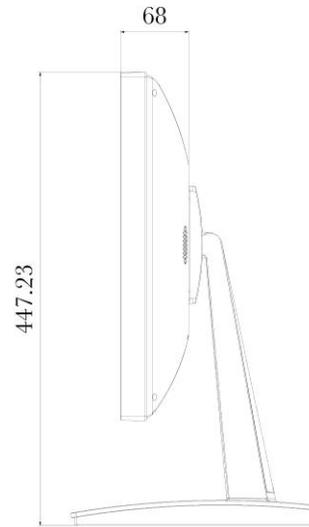

UNLESS OTHERWISE SPECIFIED	
LENGTH	TOLERANCE
0-6	+0.10
7-30	±0.20
31-100	±0.30
101-300	±0.50
301-UP	±0.70
ANGLE	±1.0°

TITLE	外觀尺寸圖	DATE	2018/03/02	MATERIAL THICKNESS	
P/N	024-A0320-80D01_VT-240XPN7	REV.		FINISH	

UNIT	mm	CHECK	Kevin	SHEET	1/1
SCALE	1:1	DRAW	Andy	SIZE	A0 MAX

宜春企業股份有限公司  
VITA ELECTRONICS  
CO.,LTD