




Description	Model Name	VT-270NPx3	VT-270NPx4	VT-270XPx3	VT-270XPx4	VT-270DPx3	VT-270DPx4
Product Type	Plastic LCD monitor						
Chassis Type	Plastic chassis ( ABS ) with 100 x 100 / 100 x 200 mm VESA mount						
Enhanced Chassis	N/A						
Glass / Touch Panel	Optional: Capacitive touch (USB interface)						
LCD Panel Spec	27" LED backlight						
Panel Resolution	1920 x 1080 pixels						
Active Screen Area	597.6 x 336.15 mm						
Color Depth	16.7M colors (RGB 8-bit)						
Brightness / Contrast	350 nits / 3000 :1						
Viewing Angle (Typ.)	178°(H) / 178°(V)						
Support Resolution	640 x 480 800 x 600						

	1024 x 768 1280 x 1024 1360 x 768 1680 x 1050 1920 x 1080					
<b>I/O Port</b>	D-Sub ( VGA ) HDMI BNC in  BNC out  USB 2.0 Type B (Touch)(Optional) Adapter(Optional)  DC Jack ( $\phi = 2.0\text{mm}$ )	D-Sub ( VGA ) HDMI BNC in  BNC out  USB 2.0 Type B (Touch)(Optional) AC Socket	D-Sub ( VGA ) HDMI 1.4a DP 1.2  USB 2.0 Type B (Touch) (Optional) Adapter(Optional)  DC Jack ( $\phi = 2.0\text{mm}$ )	D-Sub ( VGA ) HDMI 1.4a DP 1.2  USB 2.0 Type B (Touch)(Optional) AC Socket	D-Sub ( VGA ) DVI USB 2.0 Type B (Touch)(Optional) Adapter(Optional)  DC Jack ( $\phi = 2.0\text{mm}$ )	D-Sub ( VGA ) DVI USB 2.0 Type B (Touch)(Optional) AC Socket
<b>Audio</b>	Optional : 2.5W ( 8 $\Omega$ ) speaker x 2					
<b>Power</b>	External power adapter, AC IN:100~240V; 50/60Hz DC OUT:12V / 5A	Internal power adapter, AC IN:100~240V; 50/60Hz DC OUT:12V / 5A	External power adapter, AC IN:100~240V; 50/60Hz DC OUT:12V / 5A	Internal power adapter, AC IN:100~240V; 50/60Hz DC OUT:12V / 5A	External power adapter, AC IN:100~240V; 50/60Hz DC OUT:12V / 5A	Internal power adapter, AC IN:100~240V ; 50/60Hz DC OUT:12V / 5A
<b>Power Consumption</b>	Max. 30.6 W					
<b>Accessory (Optional)</b>	VGA cable	VGA cable	VGA cable	VGA cable	VGA cable	VGA cable

	HDMI cable	HDMI cable	HDMI cable	HDMI cable	DVI cable	DVI cable
	BNC cable	BNC cable	DP cable	DP cable	USB cable	USB cable
	USB cable	USB cable	Adapter	USB cable	Adapter	Power cable, CD
	Adapter	Power cable, CD	USB cable	Power cable, CD	Power cable, CD	
	Power cable, CD		Power cable, CD			
<b>Dimension</b>	Main body : 647.86(W) 470.73(H) 249.86(D) mm					
	Packing : 730(W) 560(H) 300(D) mm					
<b>Net Weight</b> (Reference)	8.6 kg (w/ touch) / 7.4 kg (w/o touch)					
<b>Gross Weight</b> (Reference)	12.6 kg (w/ touch) / 11.4 kg (w/o touch)					
<b>Temperature Range</b>	Operating : 5 ~ 40°C / Storage : -10 ~ 60°C					
<b>Humidity Range</b>	Operating : 20 ~ 80% / Storage : 10 ~ 90%					
<b>EMC / Safety</b>	IEC62368 / CE / FCC, RoHS / REACH					

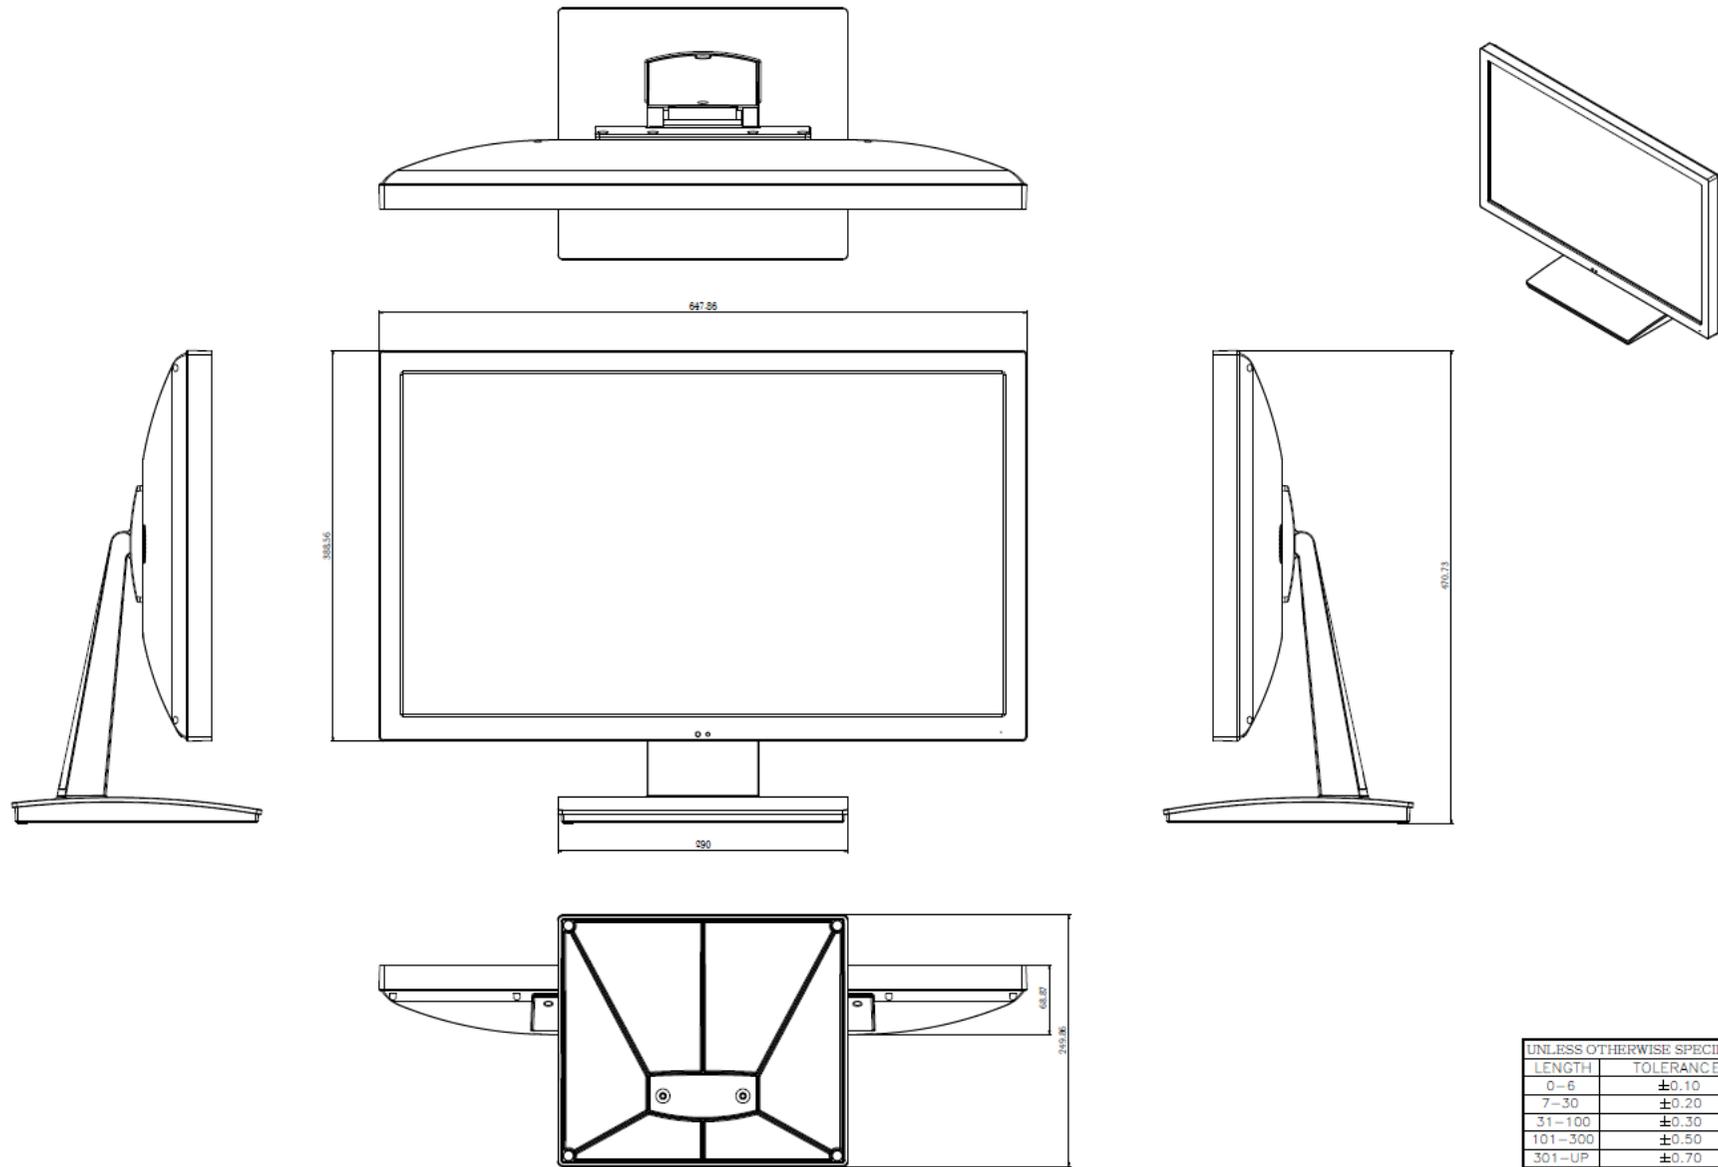

UNLESS OTHERWISE SPECIFIED	
LENGTH	TOLERANCE
0-6	±0.10
7-30	±0.20
31-100	±0.30
101-300	±0.50
301-UP	±0.70
ANGLE	±1.0°

TITLE	27"非全面+大方座	DATE	2020.01.21	MATERIAL THICKNESS			UNIT	mm	CHECK	Kevin	SHEET	1/1	宜春企業股份有限公司 VITA ELECTRONICS CO.,LTD
P/N	027-00000-80281	REV.		FINISH			SCALE	1:1	DRAW	Elca	SIZE	A0 MAX	