




Model Name	VT-270AHx3	
Description		
Product Type	Hybrid Series Plastic LCD monitor	
Chassis Type	Plastic chassis (ABS) with 100 x 100 / 100 x 200 mm VESA mount	
Optional Function	Reading light (Optional) Camera & microphone (Optional) RFID reader (Optional) USB hub (Optional) Cable cover (Optional) Stand base (Optional)	
Glass / Touch Panel	Optional: Projective capacitive touch (USB interface) / Glass	
LCD Panel Spec	27" LED backlight	
Panel Resolution	3840 x 2160 pixels	
Active Screen Area	596.16 x 335.34 mm	

Color Depth	1.07B colors (RGB 8-bit + Hi FRC)	
Brightness / Contrast	800 nits / 1000 :1	500 nits / 1000 :1
Viewing Angle (Typ.)	178°(H) / 178°(V)	
Support Resolution	640 x 480 800 x 600 1024 x 768 1280 x 1024 1360 x 768 1680 x 1050 1920 x 1080 2560 x 1440 3840 x 2160	
I/O Port	VGA DP 1.2 HDMI 2.0 DVI-Dual EX-SDI in EX-SDI out Audio in (3.5mm Phone Jack) (Optional) USB 3.0 Type B (up stream)(Optional) USB 3.0 Type A (down stream)(Optional) DC Jack (4 Pin mini din)	
Audio	Optional : 10W (8Ω) speaker x 2	

Power	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 24V / 6.6A	
Power Consumption	Max. 142.7 W	Max. 114.41 W
Accessory (Optional)	VGA cable DP cable HDMI cable DVI-Dual cable BNC cable Audio cable (Optional) USB Type A cable (Optional) USB Type B cable (Optional) Adapter Power cable, CD	
Dimension	Main body : 657.05(W) 502(H) 248.87(D) mm	
	Packing : 773(W) 596(H) 297(D) mm	
Net Weight (Reference)	10.7 kg	10 kg
Gross Weight (Reference)	15.47 kg	14.77 kg
Temperature Range	Operating : 5 ~ 40°C / Storage : -10 ~ 60°C	
Humidity Range	Operating : 20 ~ 80% / Storage : 10 ~ 90%	
EMC / Safety	IEC 62368 / CE / FCC, RoHS / REACH	

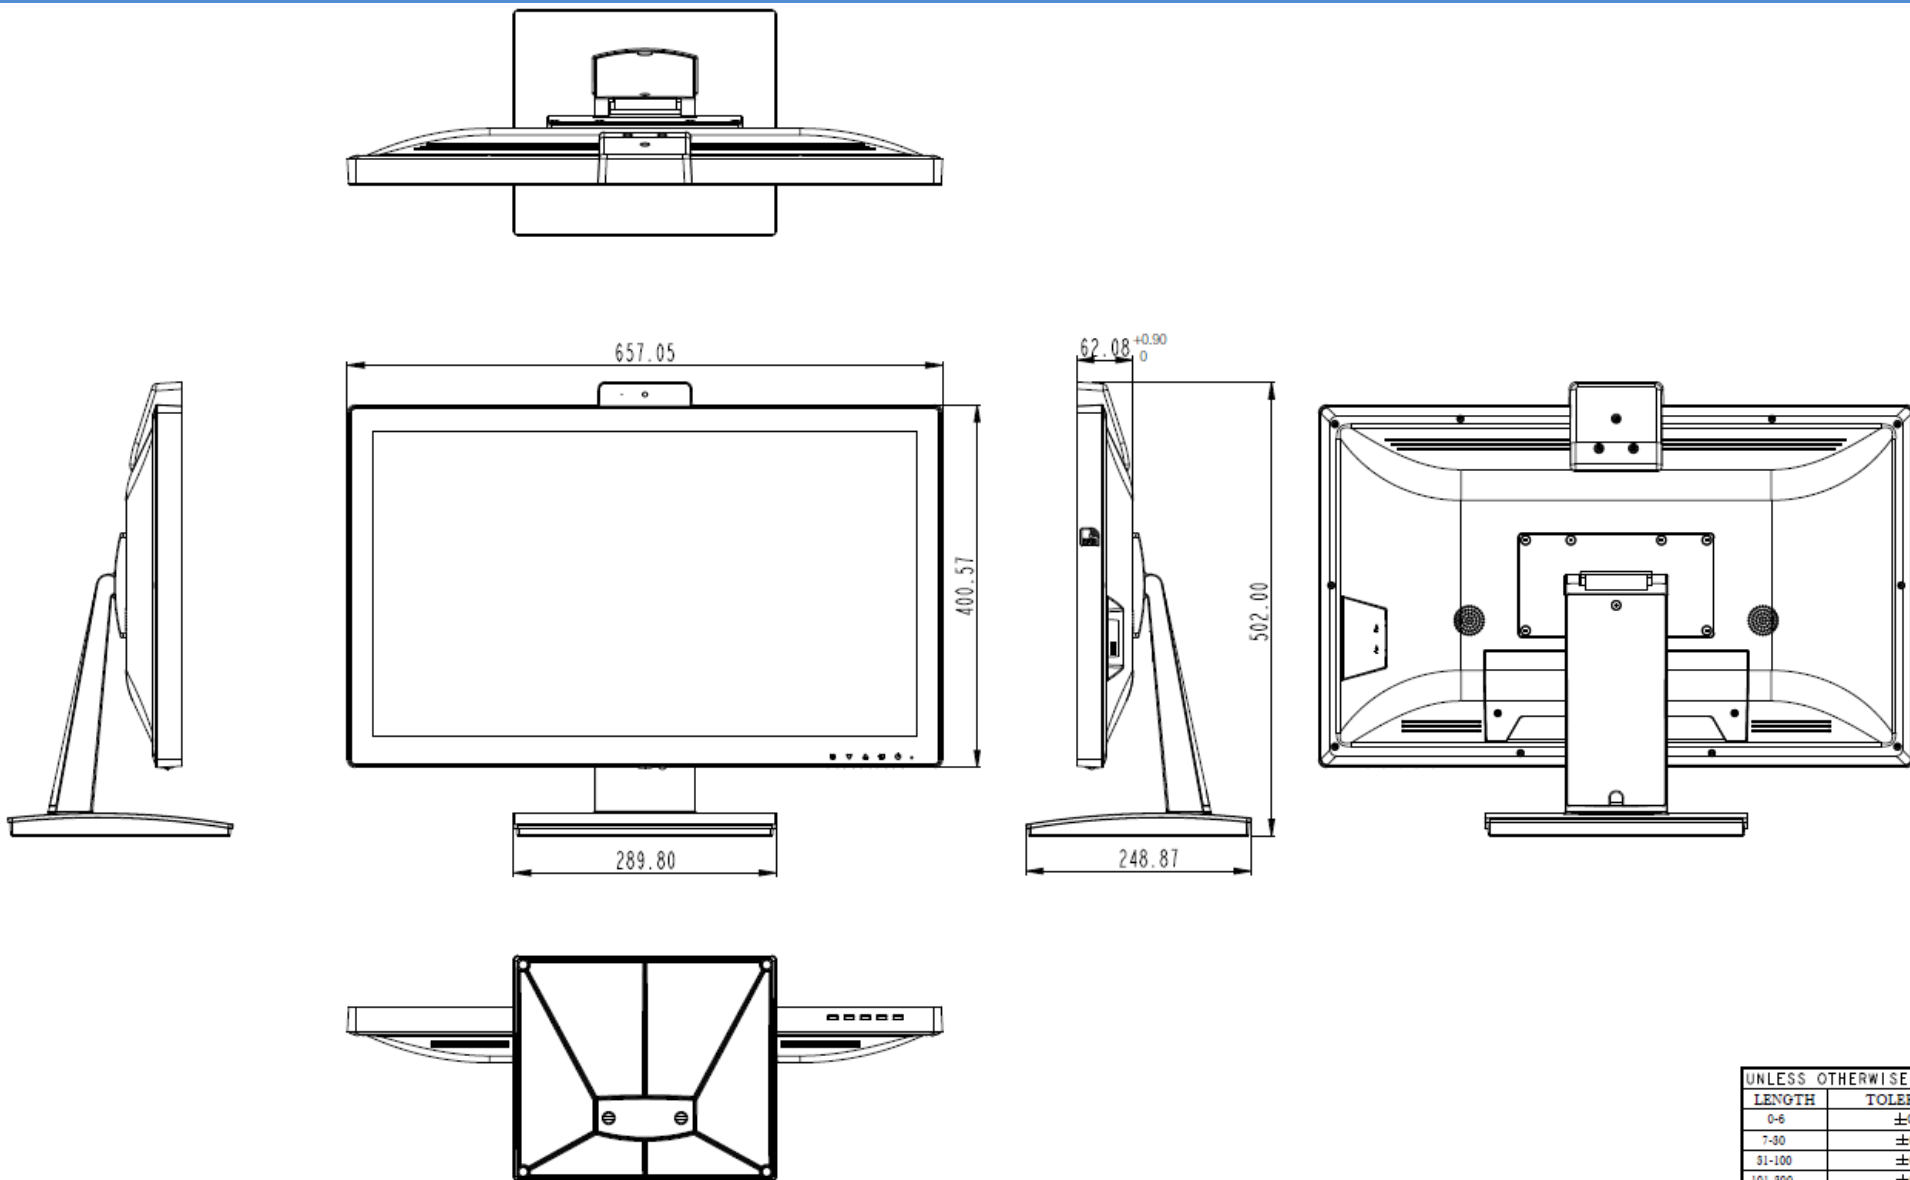

UNLESS OTHERWISE SPECIFIED	
LENGTH	TOLERANCE
0-6	±0.10
7-30	±0.20
31-100	±0.30
101-300	±0.50
301-UP	±0.70
ANGLE	±1.0°

TITLE	VT-270H1 ALL+底座 (塑膠後殼+實體key)	DATE	20203/4/20	MATERIAL THICKNESS	--		UNIT	mm	CHECK	Kevin	SHEET	1/1	宜睿企業股份有限公司 VITA ELECTRONICS CO., LTD.
P/N	--	REV.	--	FINISH	--		SCALE	1:1	DRAW	OU Lee	SIZE	A0 MAX	