




Model Name	VT-238XTx3	VT-238XTx4	VT-238DTx3	VT-238DTx4
Description				
Product Type	True Flat Series Plastic LCD monitor			
Chassis Type	Plastic chassis (ABS) with 100 x 100 / 100 x 200 mm VESA mount			
Enhanced Chassis	N/A			
Glass / Touch Panel	Optional: Projective capacitive touch (USB interface) / Glass			
LCD Panel Spec	24" LED backlight			
Panel Resolution	1920 x 1080 pixels			
Active Screen Area	527.04 x 296.46 mm			
Color Depth	16.7M colors (RGB 8-bit)			
Brightness / Contrast	400 nits / 1000 :1			
Viewing Angle (Typ.)	178°(H) / 178°(V)			
Support Resolution	640 x 480 800 x 600			

	1024 x 768 1280 x 1024 1360 x 768 1680 x 1050 1920 x 1080			
I/O Port	D-Sub (VGA) DP 1.2 HDMI 1.4a Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch) (Optional) DC Jack ($\phi = 2.0\text{mm}$)	D-Sub (VGA) DP 1.2 HDMI 1.4a Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch) (Optional) AC Socket	D-Sub (VGA) DVI Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack ($\phi = 2.0\text{mm}$)	D-Sub (VGA) DVI Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket
Audio	Optional : 2.5W (8 Ω) speaker x 2			
Power	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A	Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz	External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A	Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz
Power Consumption	Max. 26.5 W			
Accessory (Optional)	VGA cable DP cable HDMI cable USB cable Audio cable Adapter	VGA cable DP cable HDMI cable USB cable Audio cable Power cable, CD	VGA cable DVI cable USB cable Audio cable Adapter Power cable, CD	VGA cable DVI cable USB cable Audio cable Power cable, CD

	Power cable, CD
Dimension	Main body : 576.89(W) 447.74(H) 250(D) mm
	Packing : 645(W) 545(H) 295(D) mm
Net Weight (Reference)	8.1 kg
Gross Weight (Reference)	11.5 kg
Temperature Range	Operating : 5 ~ 40°C / Storage : -10 ~ 60°C
Humidity Range	Operating : 20 ~ 80% / Storage : 10 ~ 90%
EMC / Safety	IEC62368 / CE / FCC, RoHS / REACH

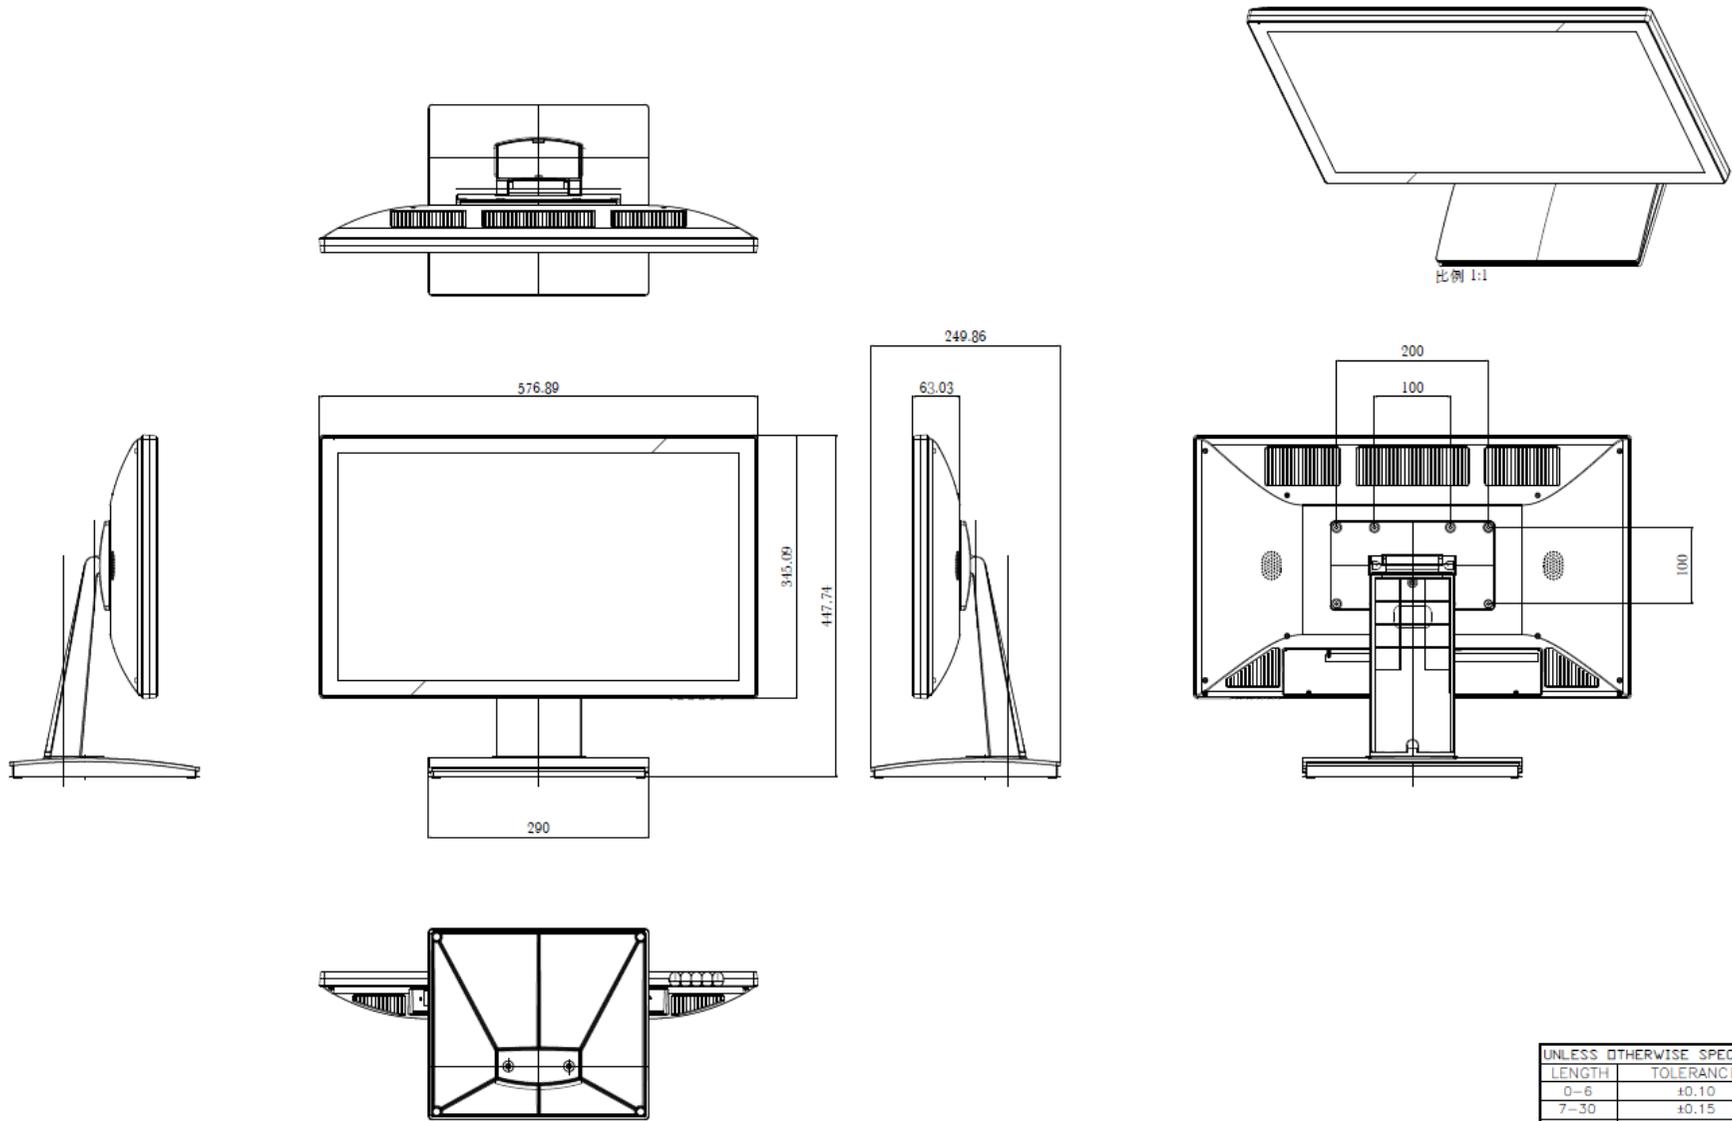

UNLESS OTHERWISE SPECIFIED	
LENGTH	TOLERANCE
0-6	±0.10
7-30	±0.15
31-100	±0.20
101-300	±0.25
301-UP	±0.30
ANGLE	±1.0°

TITLE	VT-238JTP7	DATE	2023/5/29	MATERIAL THICKNESS	--		UNIT	mm	CHECK	Kevin	SHEET	1/1	宜春企業股份有限公司 VITA ELECTRONICS CO., LTD.
P/N	--	REV.	--	FINISH	--		SCALE	1:1	DRAW	Adley	SIZE	AU 94%	